


A solução para visualização , análise , gravação e partilha fácil de imagens de conectores ST, SC, FC, E2000 e LC, versões PC ou APC. nos conectores quer dos jumpers quer nos ODF quer dos equipamentos.



Special Features

- WiFi and USB connection to Smartphone and PC
- Android App and iOS (Apple) App both
- Pass/Fail Analysis to IEC 61300-3-35
- Available several connector & adaptor types Tips
(Both Female / Male Tip)
- External Interface : mini 5-pin type
- Save inspected images and reports
- Real-time report in field through smartphone

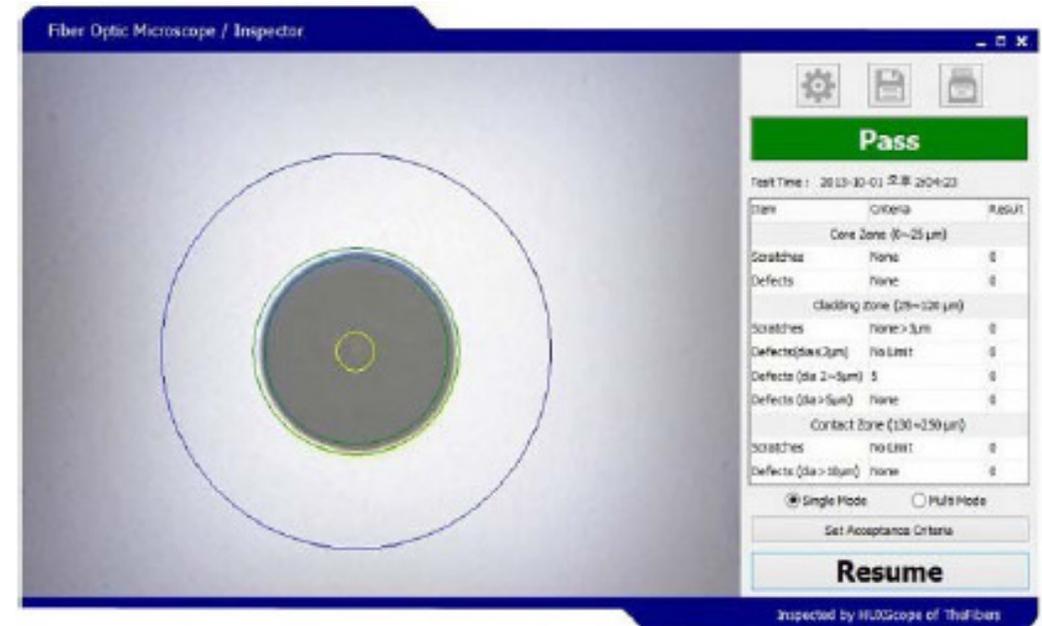

| | | |
|----------------------|--|--------------------------------------|
| Magnification | 260X - 400X | |
| Field of Vision | 400um x 300um | |
| Focus | Manual, Maximum 2mm in and out | |
| WiFi | 2.4GHz WiFi IEEE 802.11b/g/n | |
| Power of Charger | 110/220V@50/60Hz Charger or USB Cable with PC | |
| Battery | 3.7V 1300mA Rechargeable Lithium Polymer Battery | |
| Battery Running Time | Approx. 4 hours (continuous usage) | |
| USB Cable | mini 5-pin to USB 2.0 for Windows XP, WIN7/8 | |
| Software | For PC | Pass/Fail Analysis to IEC 61300-3-35 |
| | For Smartphone | Android App and iOS (Apple) App |